

Technical data sheet

Model TST50
for inward/outward opening doors



Profile detail

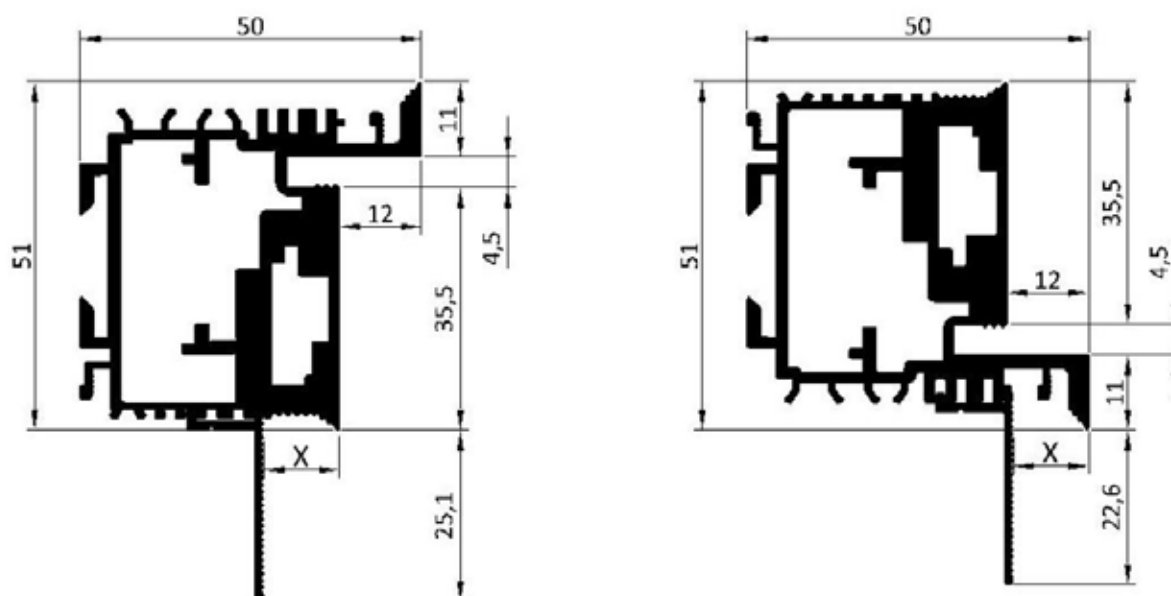

$$X = 11/14 \text{ mm}$$

Model TST50		
Description	Item number	Standard lengths*
TST50	10139	5500 mm

*Special lengths on request.

Model TST50
<u>Suitable for solid and dry construction</u>
The frame profiles are supplied mitre-cut to suit door size, and machined to suit concealed hinges, lock strikes and other hardware. In combination with the snapIn corner connectors and the mounting brackets, this enables quick assembly and professional installation. The snap-in mesh ensures no plaster cracks between wall and frame. Suits standard or floor-to-ceiling doors.

Here you can find the assembling video:





masonry construction



drywall


Door leaf

Inward opening doors

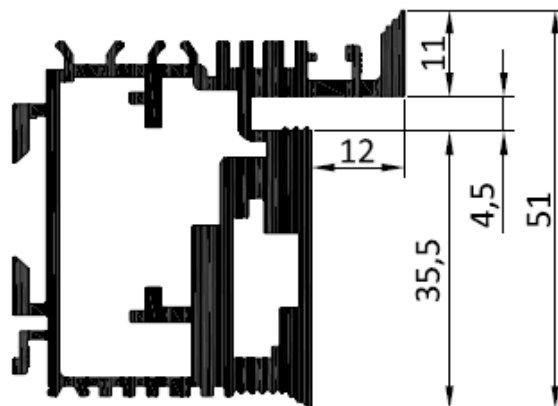


Detachable profile for drywall

Rebate dimension for 5mm door seal

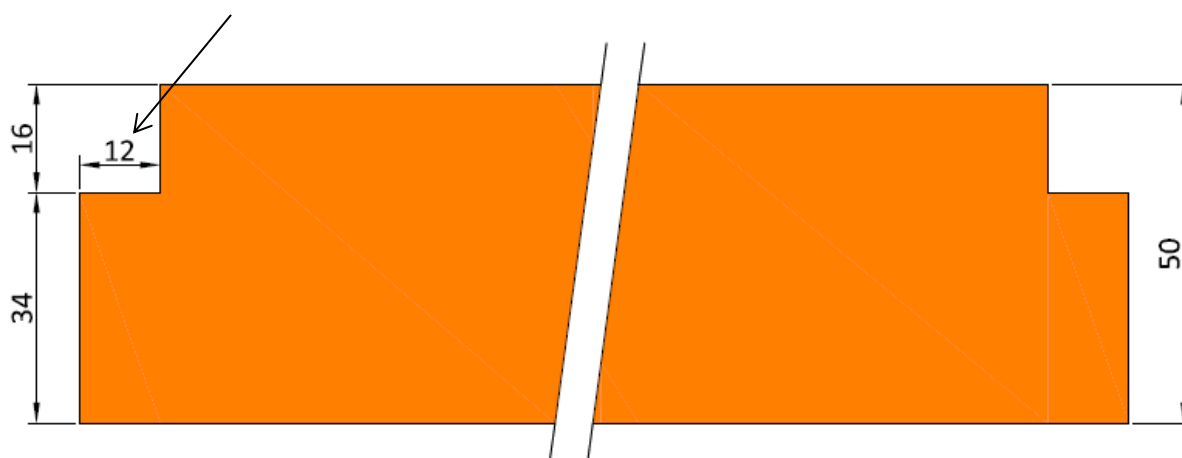


 classicnext

Outward opening doors

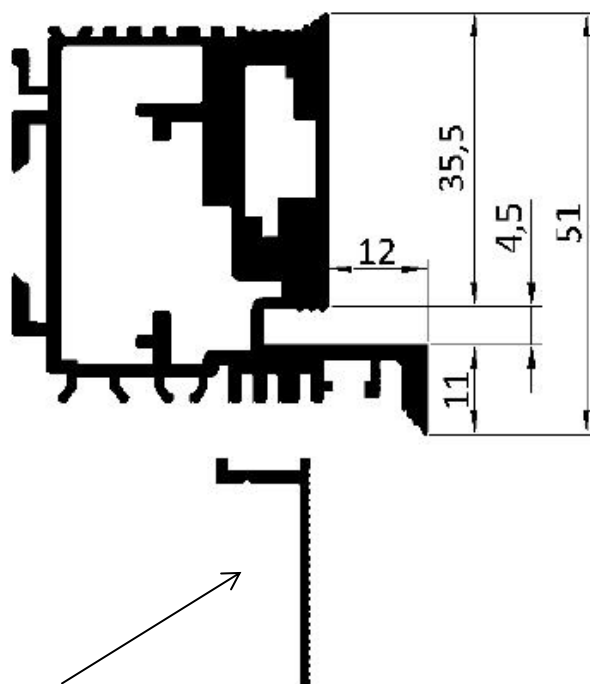

Detachable profile for drywall

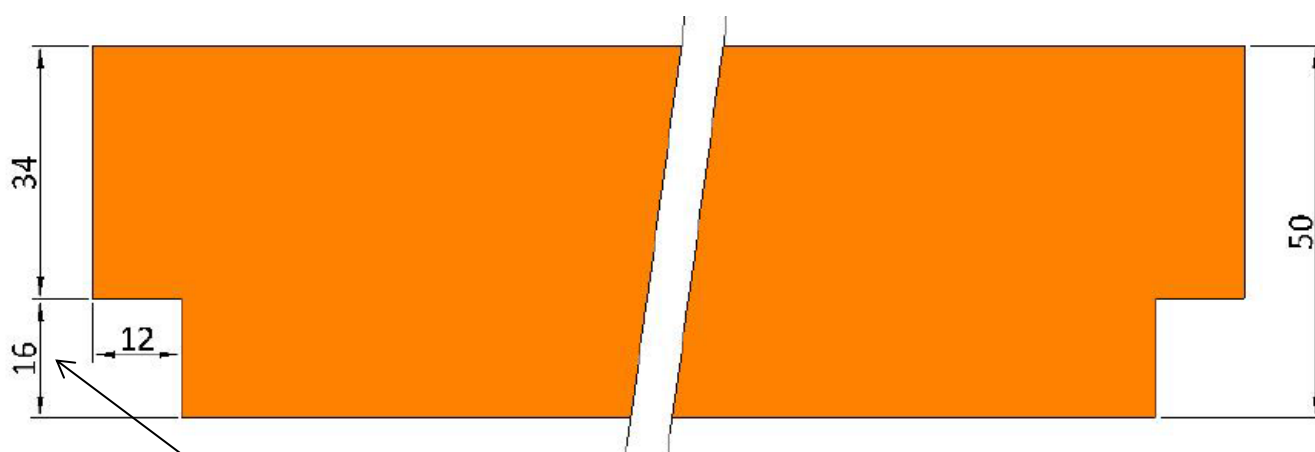

Rebate dimension for 5mm door seal

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works.

Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.